


W 350 H

EQUIPO HIDROLIMPIADOR DE ALTAS PRESTACIONES PARA LIMPIEZA URBANA
HIGH PERFORMANCE WATERCLEANER EQUIPEMENT FOR URBAN CLEANING
HOCHLEISTUNGS-AUSSTATTUNG WASSERREINIGUNG FÜR DIE KOMMUNALREINIGUNG
LAVEUSE DE VOIRIE A HAUT RENDEMENT


EURO V


W 350 H



www.ausa.com

*

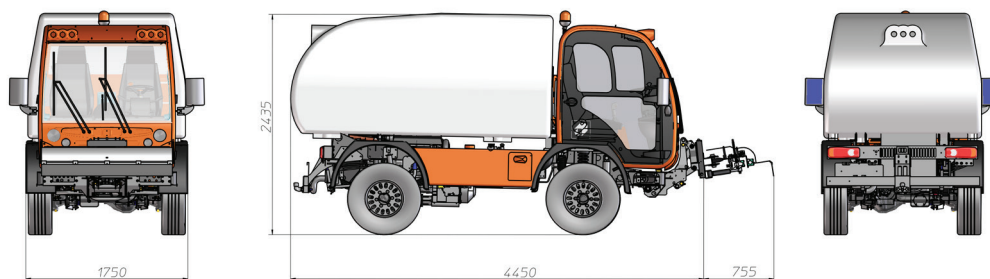

TECHNICAL SPECIFICATIONS

		W 350 H
Load capacity (Kg)		3000
Engine	Make	VOLKSWAGEN
	Type	2.0 TDI EURO 5
	Potencia (kW/CV)	75 - 102 (3000 rpm)
	Nº of cylinders	4
	Cooling	Liquid
	Fuel	Diesel
Transmission	Tank capacity (lts)	85
		2 Hydrostatic ratios and 2 gear on reduction box
	Speed	Limited to 40 Km/h / Optional 62 Km/h available in certain countries
Gradient negotiable (with full load)	Traction	4x2 continuous with central differential system and rear locking differential on rear axle
		4x4 disconnectable with FullGrip®
Brakes		38%
Steering	Service	Hydraulic pump with servo brake, discs on front wheels and drum on rear wheels
	Parking	Optional ABS+EDB (Standard at 62 km/h)
Suspension		Negative parking brake, hydraulically released
		Hydraulically power-assisted steering
Attack	Front suspension	Front suspension helicoidal spring & hydraulic damper
	Rear suspension	Rear suspension parabolic leaf spring & Hydraulic damper
Weight (Kg)	Obstruction angle	26°
	Departure angle	62°
Hydraulic flow	Unloaded weight *	3455 - 3575 (1845-1940 front axle ; 1610-1655 rear axle)
	Gross weight	6400 (2650 front axle ; 3750 eje rear axle)
Hydraulic power take-off		Steering pump 12 l/min. Service pump 1: 35 l/min. // Service pump 2: 30l/min.
		8 front, 6 rear. Presión máx. 180 bar / Max. flow. 60 l/min.

STANDARD EQUIPMENT

Front plate for attachments
Chassis LINKSystem®
Polyester tank capacity 1800l
Racor for filling water in right side
The high pressure pump is powered by an hydraulic motor driven by the main hydraulic circuit of the truck
High presure pump with a maximum delivery of 17l/min. at 210 bar
Hydraulic pump and motor without CO2 emissions and very low noise level
Hose reel of 25m with gun and high pressure lance
Shelving to store cleaning supplies
Closed cabin with heating
Electronical setting of rpm engine
Doors with wide round visibility
Heated rear mirrors elect. adjustable
Driver seat with pneumatic suspension
Passenger seat with mechanical suspension
Roating beacon with telescopic support
Wiring for transceiver set
Radio-CD & MP3 + Bluetooth
Approved lighting system
Beacons elect. adjustable
Wheel wrench

OPTIONAL EQUIPMENT

Optional 62 Km/h available in certain countries
Hot water boiler (Temperature 80°)
Cleaning dome with 2 boilers (Temp. 80° with high presure pump. 38l/min at 200 bar)
Dispenser for chemical products
front bar with nozzles to clean with pressure the pavement or the road
Tacograph
Air conditioning
Towing hitch ball (50 mm) with electric socket
Towing hitch "Rockinger" with electric socket
Spare wheel
Passenger seat with pneumatic suspension
4x4 rear locking differential

MKT22027.02/01.2015

* Load or dimension data may change due to optional equipment

AUSA reserves the right to make any changes in the specifications without prior notice.